



Ø 508  
Fastened With  
5 Bolts  
Both Ends

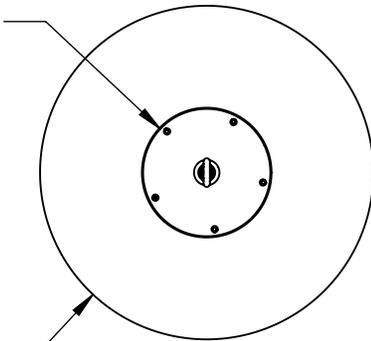


Ø 1344

Locking Nut  
Welded In Place  
Both Ends




#8 Swivel  
Eye Nut  
Both Ends

Welded Sleeve  
for Increased Wear  
Resistance

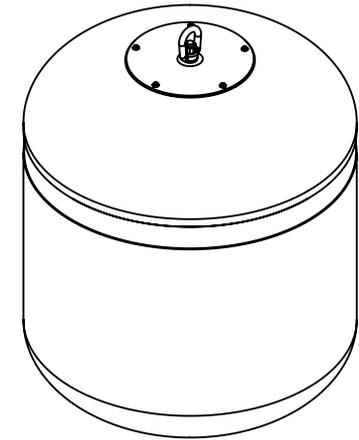



DETAIL A  
SCALE 1 : 15

111

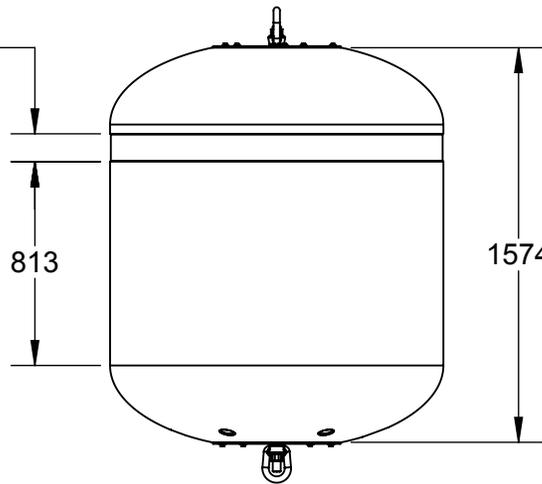

813

1574

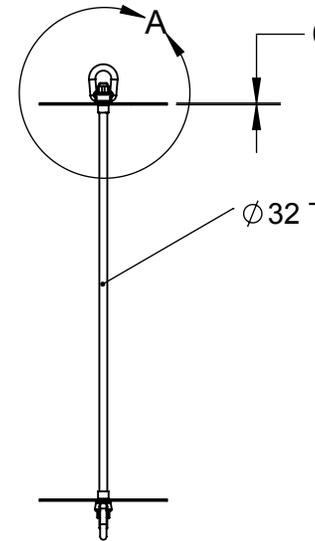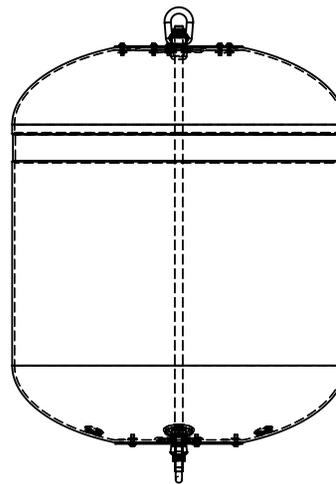

Ø 32 Threaded Rod

Notes:

1. Total Displacement Approximately 1850 L
2. EPS Foam Filled

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NORTHWEST PLASTICS LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NORTHWEST PLASTICS LTD IS PROHIBITED.



200 - 1605 Industrial Ave.  
Port Coquitlam, BC V3C 6M9  
(604) 552-9734

DO NOT SCALE DRAWING

DRAWN BY

TK

DATE

08/22/16

DIMENSIONS ARE IN  
MILLIMETERS

TOLERANCES:  
+/- 1.5%

CB 1850 STANDARD ASSEMBLY

SIZE  
A

DWG. NO.

TK-020-001

SCALE:1:30

SHEET 1 OF 1