

FEATURES & BENEFITS

- High strength galvanized steel hardware tested to 75,00 lbs. of tensile strength providing superior strength and corrosion resistance
- Highest quality UV stabilized seamless one-piece construction with uniform wall thickness ensures a robust life expectancy to 15+ years
- Large diameter load plates secured to the shell for maximum load disbursement
- Refined EPS foaming process with over 20 years of experience significantly reduces risk of sinking and environmental contamination
- Swivel eyes prevent twisting and moderate strain on the tackle
- Indented area for retro-reflective tape inhibits sliding and loss of reflective material

GENERAL SPECIFICATIONS

| | |
|--------------------|-------------------|
| Diameter | 52 ½" / 1.32m |
| Wall Thickness | ¼" / 6mm |
| Height | 42" / 1.07 m |
| Air Weight | 185 lbs / 84 kg |
| Total Displacement | 2645 lbs / 1200 L |

MATERIAL SPECIFICATIONS

POLYETHYLENE

Virgin PE material with a UV 15 inhibitor

COLOUR

Comes in standard white with the top 1/3rd of the part orange

EPS FOAM

1 lb/ft.³ / 16 kg/m³ density closed cell EPS

STAINLESS STEEL



Inserts are made with a minimum rating of 18-8 stainless steel

GALVANIZED STEEL

Internal components are hot-dipped galvanized

AVAILABLE OPTIONS

- Reflective banding
- Custom colours
- Custom graphics

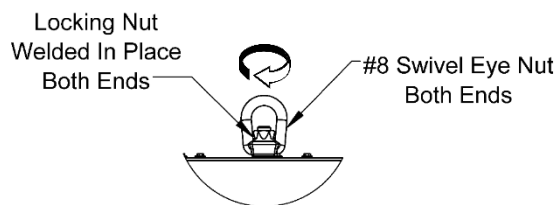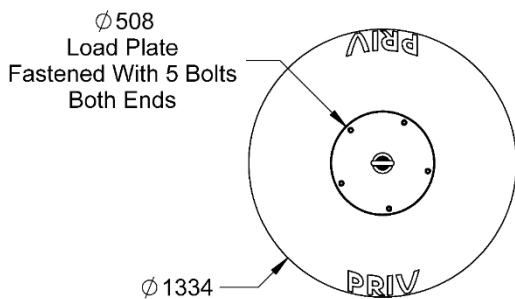

DETAIL A
SCALE 1 : 15

