



MB45 STANDARD MOORING BUOYS

FEATURES & BENEFITS

- High strength galvanized steel hardware providing superior strength and corrosion resistance
- Refined EPS foaming process with over 20 years of experience significantly reduces risk of sinking and environmental contamination
- · Swivel eyes prevent twisting and moderate strain on the tackle
- · Free of internal voids prevents significant water ingress and produces superior structural integrity
- Highest quality UV stabilized seamless one-piece construction with uniform wall thickness ensures a robust life expectancy to 15+ years
- Impact resistant even at low temperatures means it's suitable for harsh applications in saltwater or freshwater bodies

GENERAL SPECIFICATIONS

Diameter	468 mm
Wall Thickness	4.8 mm
Height	627 mm
Air Weight	5 kg
Total Displacement	51 L

AVAILABLE OPTIONS

- Reflective banding
- Custom colours
- Custom graphics
- (Available options are subject to min. order quantity)


MATERIAL SPECIFICATIONS

POLYETHYLENE

Virgin PE material used with a UV 15 inhibitor **COLOUR** Comes in standard white with the top 1/3rd above water line orange **EPS FOAM** 16 kg/m³ density closed cell EPS foam used

GALVANIZED STEEL

Internal components are hot-dipped galvanized

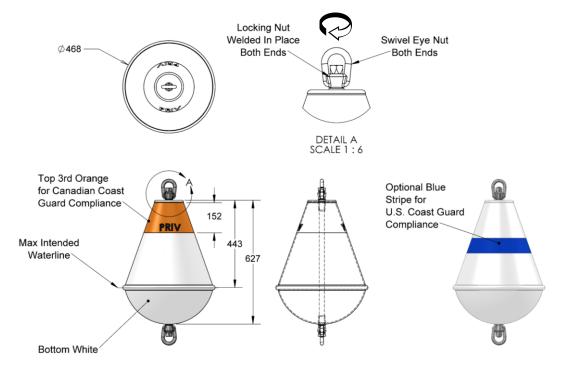

CONTACT US

Phone: (604) 229-4084 Toll Free: 1-888-318-6604 info@tidalmarine.ca www.tidalbuoys.com