



MB76 STANDARD

MOORING BUOYS

FEATURES & BENEFITS

- · High strength galvanized steel hardware providing superior strength and corrosion resistance
- Refined EPS foaming process with over 20 years of experience significantly reduces risk of sinking and environmental contamination
- · Swivel eyes prevent twisting and moderate strain on the tackle
- · Free of internal voids prevents significant water ingress and produces superior structural integrity
- Highest quality UV stabilized seamless one-piece construction with uniform wall thickness ensures a robust life expectancy to 15+ years
- Impact resistant even at low temperatures means it's suitable for harsh applications in saltwater or freshwater bodies

GENERAL SPECIFICATIONS

Diameter	30" / 762 mm
Wall Thickness	¼" / 6 mm
Height	29 ½" / 749 mm
Air Weight	35 lbs / 16 kg
Total Displacement	522 lbs / 237 L

AVAILABLE OPTIONS

- · Reflective banding
- · Custom colours
- · Custom graphics

CONTACT US

 (Available options are subject to min. order quantity)

MATERIAL SPECIFICATIONS

POLYETHYLENE

Virgin PE material with a UV 15 inhibitor

COLOUR


Comes in standard white with the top 1/3rd above water line orange

EPS FOAM

1 lb/ft. 3 / 16 kg/m 3 density closed cell EPS

GALVANIZED STEEL

Internal components are hot-dipped galvanized

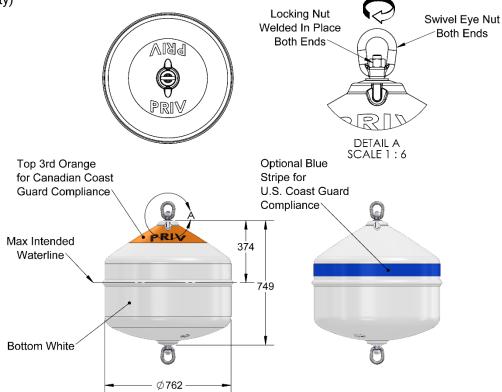

Phone: (604) 229-4084 Toll Free: 1-888-318-6604 info@tidalmarine.ca www.tidalbuoys.com