

FEATURES & BENEFITS

- Full length Virgin HDPE tube replacing the standard rod allows for versatility in mooring and easier visual inspection of the tackle
- Ultra High Molecular Weight (UHMW) Plastic Wear Collar (1.) protects wear to buoy shell from top shackle
- Pre installed owner information label & clear protective overlaminates (2.) for proper Transport Canada identification
- Refined EPS foaming process with over 20 years of experience significantly reduces risk of sinking and environmental contamination
- Free of internal voids prevents significant water ingress and produces superior structural integrity
- Highest quality UV stabilized seamless one-piece construction with uniform wall thickness ensures a robust life expectancy to 15+ years
- Impact resistant even at low temperatures means it's suitable for harsh applications in saltwater or freshwater bodies

GENERAL SPECIFICATIONS

Diameter	24" / 610 mm
Wall Thickness	1/5" / 5 mm
Height	23 1/2" / 597 mm
Air Weight	16 lbs / 7 kg
Total Displacement	266 lbs / 120 L

MATERIAL SPECIFICATIONS

POLYETHYLENE

Virgin PE material with a UV 15 inhibitor

COLOUR



Comes in standard white with the top 1/3rd above water line orange

EPS FOAM

1 lb/ft.³ / 16 kg/m³ density closed cell EPS

AVAILABLE OPTIONS

- Reflective banding
- Custom colours
- Custom graphics
- (Available options are subject to min. order quantity)

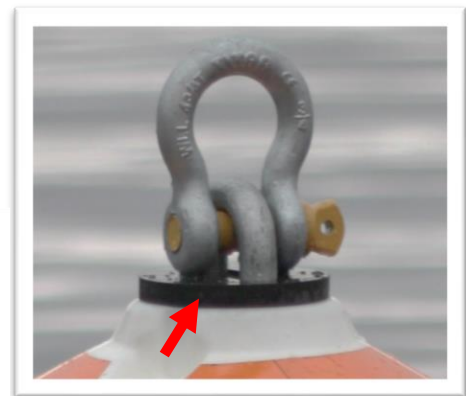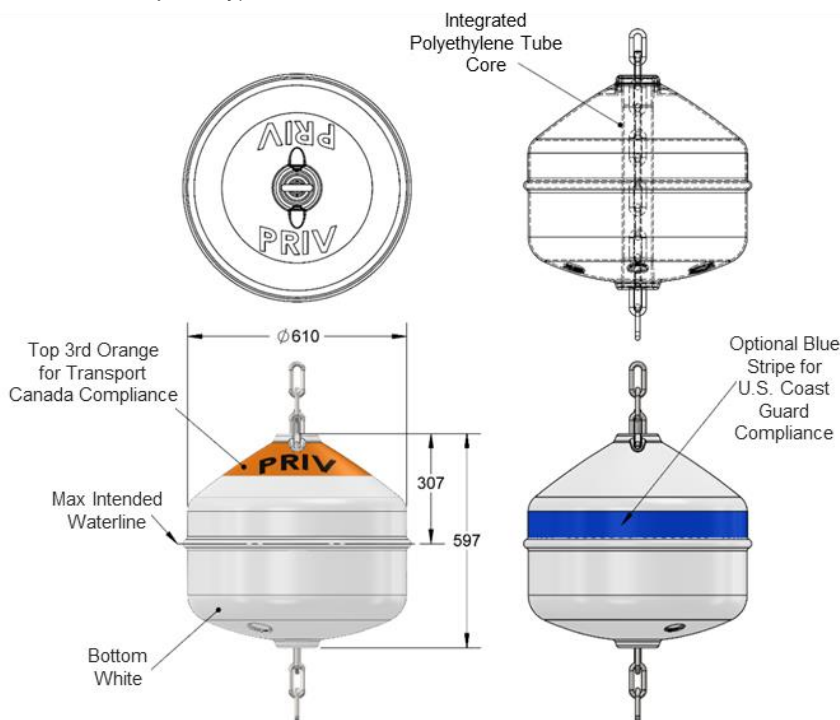

1. UHMW Wear Collar



2. Protective overlay & owner info label