

FEATURES & BENEFITS

- High strength galvanized steel hardware providing superior strength and corrosion resistance
- Refined EPS foaming process with over 20 years of experience significantly reduces risk of sinking and environmental contamination
- Swivel eyes prevent twisting and moderate strain on the tackle
- Free of internal voids prevents significant water ingress and produces superior structural integrity
- Highest quality UV stabilized seamless one-piece construction with uniform wall thickness ensures a robust life expectancy to 15+ years
- Impact resistant even at low temperatures means it's suitable for harsh applications in saltwater or freshwater bodies

GENERAL SPECIFICATIONS

Diameter	24" / 610 mm
Wall Thickness	1/8" / 5 mm
Height	24" / 617 mm
Air Weight	27 lbs / 12 kg
Total Displacement	266 lbs / 120 L

MATERIAL SPECIFICATIONS

POLYETHYLENE

Virgin PE material with a UV 15 inhibitor

COLOUR

Comes in standard white with the top 1/3rd above water line orange

EPS FOAM



1 lb/ft.³ / 16 kg/m³ density closed cell EPS

GALVANIZED STEEL

Internal components are hot-dipped galvanized

AVAILABLE OPTIONS

- Reflective banding
- Custom colours
- Custom graphics
- (Available options are subject to min. order quantity)

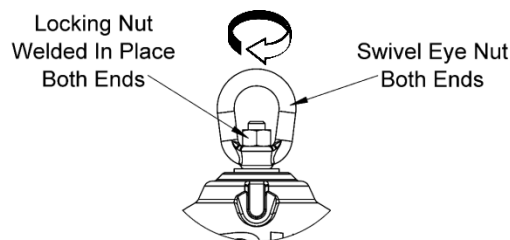

DETAIL A
SCALE 1 : 6

